



ACTIVE LED VIDEO WALL



Classic Indoor Series





Convention Centre's

Feature

Bright & Clear

Sleek Design

Durable Build

Wide Viewing Angle

Smooth Motion

Flexible Size

Energy Efficient

Easy Maintenance

Vivid Colors

Benefit

Perfect for indoor lighting, easy to read from any spot.

Fits stylishly in offices, malls, or conference rooms.

Long-lasting panels for regular indoor use.

Clear images from any seat or corner.

No flicker or lag, ideal for video and presentations.

Panels can be arranged to any shape or size.

Low power usage without compromising brightness.

Front or rear service for quick part replacement.

Sharp, vibrant visuals perfect for indoor environments.



Malls



Corporate Lobby



Auditorium



Classic Outdoor Series





Feature

- Bright Screen
- Weatherproof
- Durable Build
- Wide Viewing Angle
- Smooth Image
- Flexible Size
- Cooling System
- Energy Efficient
- Easy Maintenance
- Colors

Benefit

- Clear visibility even in sunlight.
- Works in rain, dust, and harsh outdoor conditions.
- Strong panels resist wind, heat, and impact.
- Clear images from any angle.
- No flicker on cameras or live broadcasts.
- Panels can be combined in any size or shape.
- Built-in fans prevent overheating.
- Bright display with low power consumption.
- Quick and simple part replacement.
- Bright, sharp, and vibrant visuals outdoors.


Classic Outdoor Series Specifications

Specification	P2.5	P3	P4	P5	P6
Pixel Pitch	2.5 mm	3.076 mm	4 mm	5 mm	6 mm
LED Type	SMD1415 / SMD1921	SMD1415	SMD1921	SMD1921	SMD1921
Module Resolution (W×H)	128 × 96 = 12,288	104 × 52 = 5,408	80 × 45 = 3,600	64 × 36 = 2,304	56 × 28 = 1,568
Pixel Density	~160,000 dots/m ²	105,625 dots/m ²	~62,500 dots/m ²	~40,000 dots/m ²	~27,778 dots/m ²
Module Size (W×H×D)	320 × 160 × 18.4 mm				
Module Weight	~0.43 kg	0.43±0.02 kg	~0.43 kg	~0.43 kg	~0.43 kg
Interface	HUB75	HUB75	HUB75	HUB75	HUB75
Brightness (Calibrated)	4500–5500 cd/m ²	4500–5000 cd/m ²	4500–5000 cd/m ²	4500–5000 cd/m ²	4500–5000 cd/m ²
Color Temperature	6500K (Adj. 1000–9500K)				
Beam Angle (H/V)	140° / 140°	140° / 140°	140° / 140°	140° / 140°	140° / 140°
Brightness/Color Uniformity	≥98%	≥98%	≥98%	≥98%	≥98%
Contrast Ratio	5000:01:00	5000:01:00	5000:01:00	5000:01:00	5000:01:00
Max Power Consumption	~950 W/m ²	<879 W/m ²	~850 W/m ²	~800 W/m ²	~750 W/m ²
Typical Power Consumption	~350 W/m ²	293 W/m ²	~280 W/m ²	~260 W/m ²	~240 W/m ²
Power Supply Input	AC90–132V / AC186–264V, 47–63 Hz				
Frame Changing Frequency	60 Hz				
Refresh Rate	≥3840 Hz	3840 / 7680 Hz	3840 / 7680 Hz	3840 / 7680 Hz	3840 / 7680 Hz
Processing Depth	12–14 bit				
Video Support	2K HD / 4K UHD				
Life Span	~100,000 hrs	100,000 hrs	~100,000 hrs	~100,000 hrs	~100,000 hrs
Operating Temp/Humidity	-20°C–50°C / 10–80% RH				
Storage Temp/Humidity	-20°C–55°C / 10–85% RH				
Certifications	BIS / CE / CB / ROHS / EAC	BIS / CE / CB / ROHS / EAC	BIS / CE / CB / ROHS / EAC	BIS / CE / CB / ROHS / EAC	BIS / CE / CB / ROHS / EAC

Classic COB Series



Micro LED Classic Ultra Fine Pixel Series

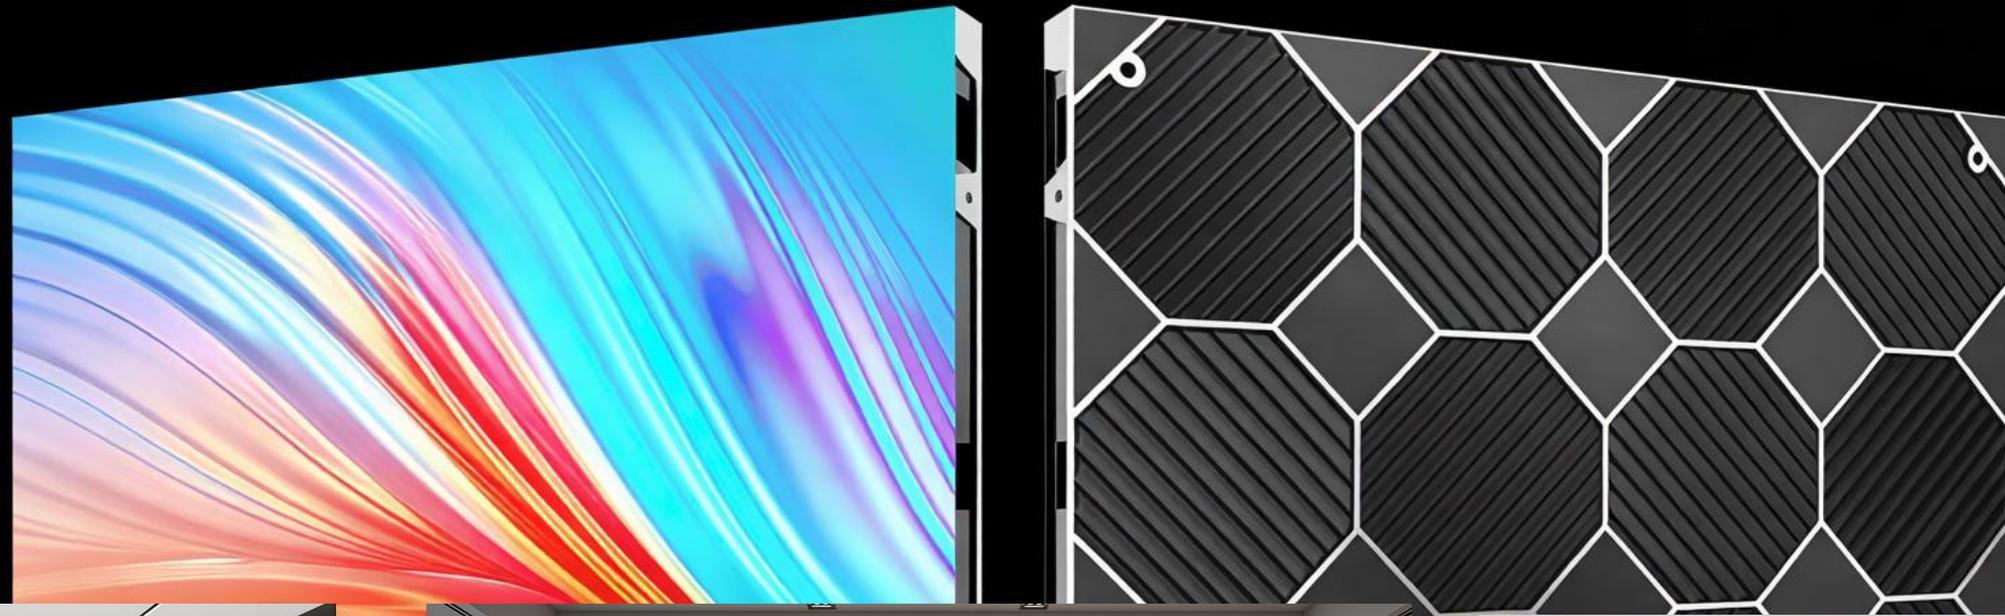

NOC Centre's



Conference Room



Broadcasting Studio

Classic Ultra Fine Pixel **COB** Micro LED

108 inches



136 inches



163 inches



8K 7680x4320

Classic COB Series Specifications

Specification Model	0.7	0.9	1.2	1.5
Pixel Pitch (mm)	0.78	0.93	1.25	1.56
Cabinet Dimensions (mm)	600 x 337.5 x 40.4			
Cabinet Weight (kg)	4.4	4.4	4.4	4.4
Cabinet Resolution (pixels)	768 x 432	640 x 360	480 x 270	384 x 216
Cabinet Pixel Density (pixels)	3,31,776	2,30,400	1,29,600	82,944
Modules per Cabinet (W x H)	4 x 2	4 x 2	4 x 2	2 x 2
Module Dimensions (mm)	150 x 168.75	150 x 168.75	150 x 168.75	300 x 168.75
Module Resolution (pixels)	192 x 216	160 x 180	120 x 135	192 x 108
Video Controller	ColorLight, WallDirector VC	ColorLight, WallDirector VC	ColorLight, WallDirector VC	ColorLight, WallDirector VC
Max. Brightness (nits)	1,500	1,500	1,000	700
Contrast Ratio	30,000:1	30,000:1	30,000:1	30,000:1
Color Temperature (K)	3,000 - 10,000 Adjustable			
Viewing Angle (Horizontal) /Vertical)	170°/150°	170°/150°	170°/150°	170°/150°
Refresh Rate (Hz)	3,840	3,840	3,840	3,840
Peak Power (W/m ²)	593	593	593	593
Typical Power (W/m ²)	127	127	127	127
Power (V-AC)	100-240	100-240	100-240	100-240
Power Supply	Single	Single	Single	Single
Operating Temperature (°C)	-10 to 40	-10 to 40	-10 to 40	-10 to 40
Operating Humidity Range	10% to 80%	10% to 80%	10% to 80%	10% to 80%
Storage Temperature (°C)	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Storage Humidity	10% to 85%	10% to 85%	10% to 85%	10% to 85%
Typical Lifetime (hrs)	1,00,000	1,00,000	1,00,000	1,00,000
Service Access	Front	Front	Front	Front

Classic Active LED Standee



INDOOR STANDEES	AVAILABLE SIZES		
P1.8 GOB	2.1 x 6.3 ft	3.14 x 6.3 ft	4.1 x 6.3 ft
P1.8 SMD	2.1 x 6.3 ft	3.14 x 6.3 ft	4.1 x 6.3 ft
P2 SMD	2.1 x 6.3 ft	3.14 x 6.3 ft	4.1 x 6.3 ft
P2.5 SMD	2.1 x 6.3 ft	3.14 x 6.3 ft	4.1 x 6.3 ft
OUTDOOR STANDEES	AVAILABLE SIZES		
P2.5	2.1 x 6.3 ft	3.14 x 6.3 ft	4.1 x 6.3 ft
P3	2.1 x 6.3 ft	3.14 x 6.3 ft	4.1 x 6.3 ft
P4	2.1 x 6.3 ft	3.14 x 6.3 ft	4.1 x 6.3 ft

Imran Shaik
 +91-9773314084
CLASSIC
 SIGNAGES PVT. LTD.

